

HARRINGTON HYDRANT STORZ CONNECTIONS

HIHS™ SPECIFICATION The Harrington Integral Hydrant Storz is threaded directly into the Mueller hydrant and is internally secured with a setscrew. The HIHS™ meets or exceeds the requirements of AWWA C502 regarding material and pressure testing. For security, a Storz spanner wrench is required for cap removal (high-torque cap removal).

The Storz nozzle shall have a brass metal face and hard anodized 6061-T6 aluminum Storz ramps and lugs. The aluminum finish shall be hardcoat anodized to MIL-A-8625, Type 3, Class I, dark gray.

The Storz cap shall have hard anodized aluminum Storz ramps and lugs made of forged 6061-T6 aluminum. The center cap shall be forged 6061-T6 aluminum. The Storz Cap shall be connected to the hydrant with a 0.125" vinyl coated stainless steel aircraft cable and (2) aluminum crimps. As a security consideration, the HIHS™ Storz cap requires a Storz spanner wrench for removal. However, the Storz Hose Coupling will connect quickly and easily by hand.

The HIHS™ is completely Made In USA


Once installed, the HIHS™ **extends only 1.75"** from the hydrant nozzle.

Specify HARRINGTON STORZ

"HIHS-MLR-50-45"


- 250 psi working pressure

- MADE IN USA



Harrington, Inc.
2630 W. 21st St.
Erie, PA 16506

Ph. 800-553-0078
daveh@harrinc.com

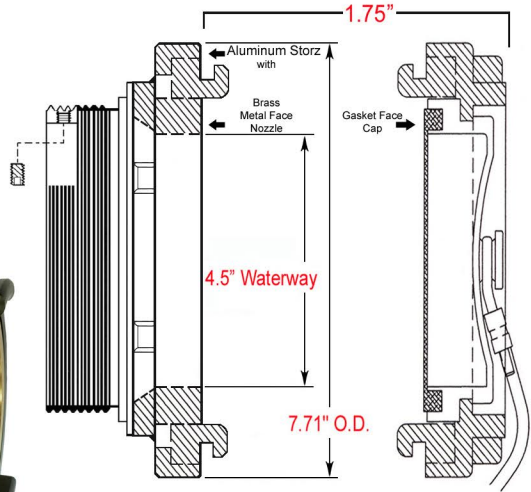

| | | | |
|--|---------|--------------------------|------|
| DWG No.: HIHS-MLR-50-45 | | | |
| 5" Storz Integral Hydrant Nozzle: 5 x Mueller nozzle with Storz Cap with stainless steel reflective aircraft cable | | | |
| Date: 07/01/18 | DB: DTH | Harrington Hydrant Storz | |
| Not to scale | | Sheet 1 of 1 | HIHS |