

HARRINGTON STORZ SPECIFICATION SHEET


HFL-FF-405030E/Cap

4" Flat Face threaded 150# Carbon Steel Flange
- Zinc Rich Primer & Powder Coated

Hard Anodized 6061-T6 Aluminum

Mil-A-8625f, Type 3

- 30° Elbow (356), 4" NPT male x 5" BSP male
Zinc Rich Primer & Powder Coated
- 5" Storz with Storz-Lok
with 5" BSP Gasket, 5" Storz Pressure Seal
- 5" Storz Cap (center cap: 356)
with 5" Storz Suction Seal,
attached with stainless steel aircraft cable
- 250 psi working pressure

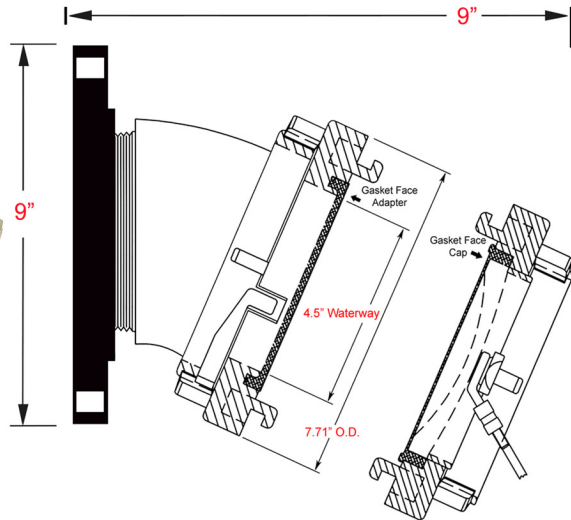

Specify **HARRINGTON STORZ: HFL-FF-405030E/Cap**



Harrington
STORZ CONNECT

2630 West 21st Street
Erie, PA 16506

ph. 800-553-0078
info@harrinc.com



HFL-FF-405030E/Cap

4" flat face 150# flange x Elbow 30° 5" Storz with
Storz Cap attached with stainless steel aircraft cable

Date: 01/01/23

Weight: 21 lbs.

Specification / Data Sheet

Not to scale



NFPA 1963 COMPLIANT

150# Flange