

# HARRINGTON CONNECTIONS

## H1000-50-60NH

### - 5" AWG BALL INTAKE VALVE

#### - 5 Year Valve Warranty\*


- Fully anodized & powder coated aluminum body
- 4" Full Flow Stainless Steel Ball
- 75-250 PSI field adjustable pressure relief valve (250-S)
- 3/4" Air Bleeder Valve
- Open/Closed indicator
- Handwheel operation, with fold-down knob
- Friction loss @ 1,000 GPM < 1 PSI
- 250 psi working pressure

### - 5" Storz


- with Storz-Lok
- 6061-T6 Aluminum
- Hard Anodized to Mil-A-8625f, Type 3
- with 5" Pressure Seal & BSP Gasket

### - 6" NH Female

- Short handle swivel
- 6061-T6 Aluminum
- Hard Anodized to Mil-A-8625f, Type 3, Dark Gray
- with 6" NH Gasket
- with 5/16" SS ball bearings

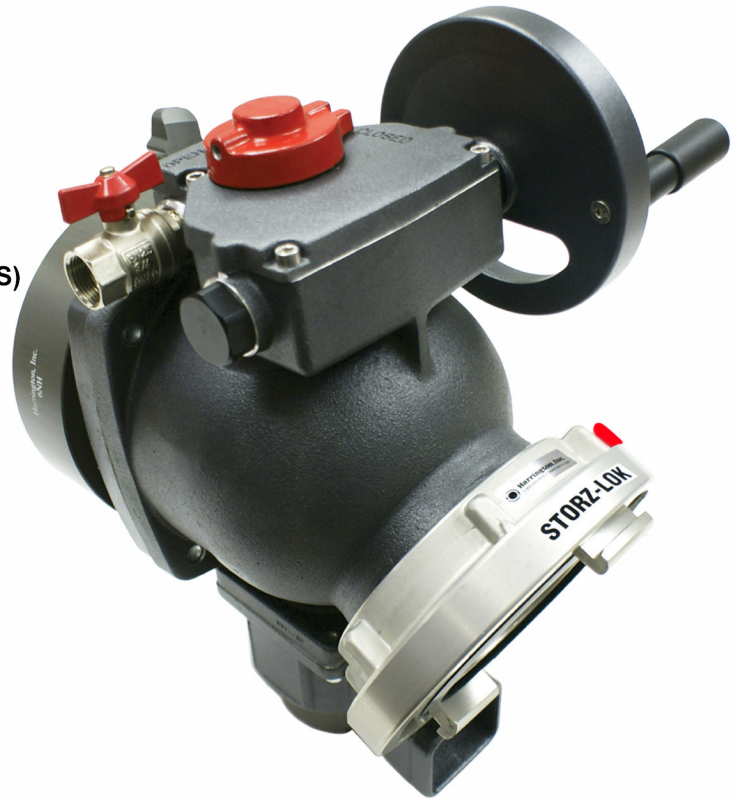

A low profile ball intake valve designed for pumper intake control. Valve meets 900 PSI hydrostatic strength test, utilizes full flow ball valve design and has easy-to-see visual indicator of ball position. Includes a 3/4" air bleeder valve, an integrated 25° elbow, and a 250 PSI Field adjustable pressure relief valve (adjustable from 75-250 PSI). The handle can be mounted on right or left side of valve.

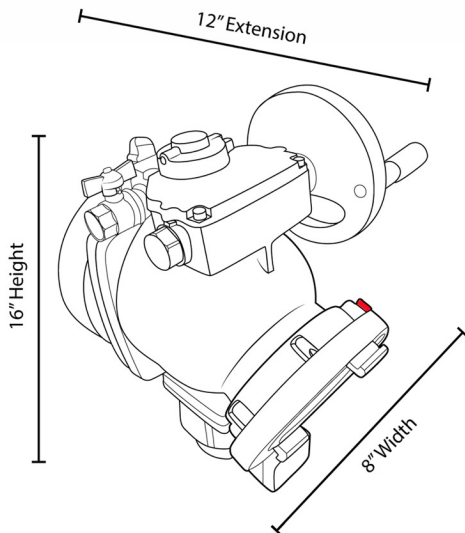

\*5 Year Valve Warranty against failure due to corrosion



Harrington, Inc.  
2630 W. 21st St.  
Erie, PA 16506

Ph. 800-553-0078  
info@harrinc.com

## H1000-50-60NH

5" BALL INTAKE VALVE with 250-S RV with 3/4" Air Bleeder  
- 5" Storz x 6" NH Female Swivel

Date: 03/21/22

Weight: 33 lbs.

Specification / Data Sheet

Sheet 1 of 1

H1000