

HARRINGTON CONNECTIONS

H1000-50ST-60FF/NORV

- 5" AWG BALL DISCHARGE VALVE

- 5 Year Valve Warranty*


- Fully anodized & powder coated aluminum body
- 4" Full Flow Stainless Steel Ball
- 3/4" Air Bleeder Valve
- Open/Closed indicator
- Handwheel operation, with fold-down knob
- Friction loss @ 1,000 GPM < 1 PSI
- 250 psi working pressure

- 6" Flat Face 150# Flange



- Carbon Steel, Weldneck flange, machined to 6" BSP male
- Zinc Rich Primer & Powder Coated

- 5" Storz


- with Storz-Lok
- 6061-T6 Aluminum Connections
- Hard Anodized to Mil-A-8625f, Type 3, Dark Gray
- 6" BSP female rocker lug with 5/16" ball groove with 6" BSP Gasket
- 5" BSP female x 5" Storz with 5" Storz Pressure Seal & BSP Gasket

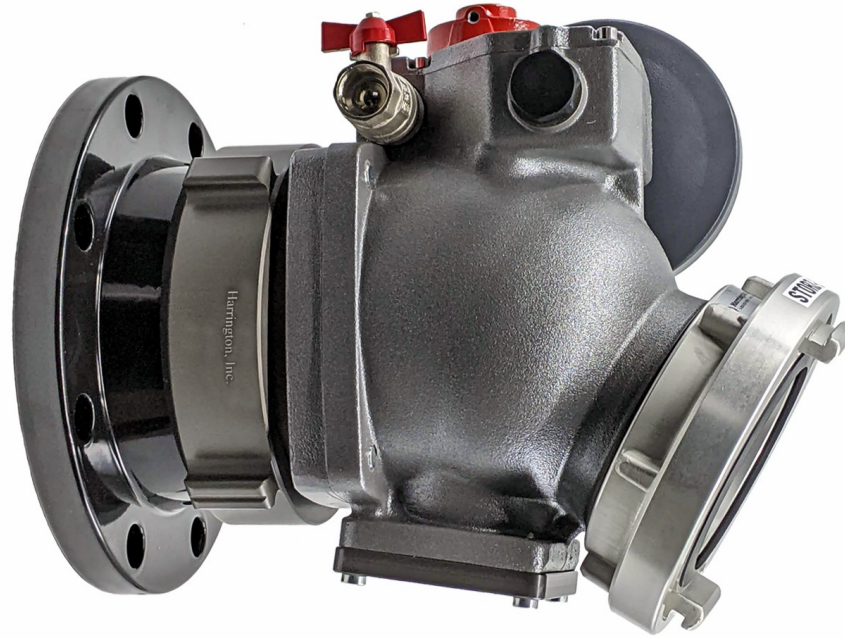

A low profile discharge ball valve designed for high flow applications. Valve meets 900 PSI hydrostatic strength test, utilizes full flow ball valve design and has easy-to-see visual indicator of ball position. Includes a 3/4" air bleeder valve and an integrated 25° elbow. The handle can be mounted on the right or left side of valve.

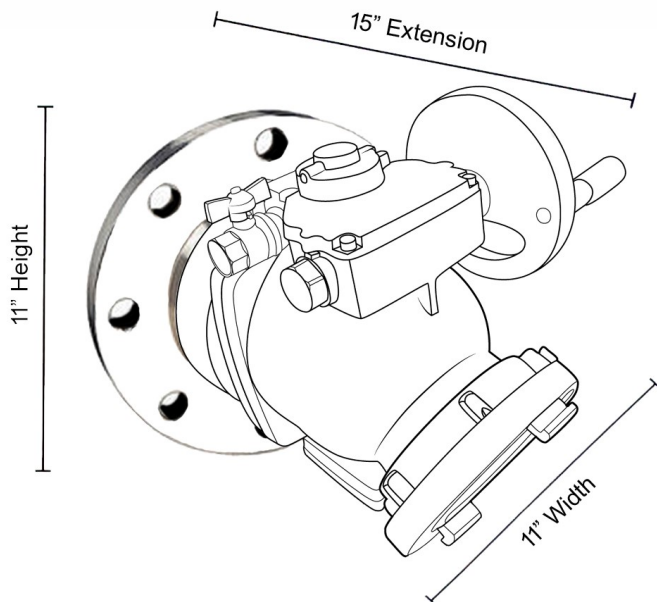

*5 Year Valve Warranty against failure due to corrosion



Harrington, Inc.
2630 W. 21st St.
Erie, PA 16506

Ph. 800-553-0078
info@harrinc.com

H1000-50ST-60FF/NORV

5" BALL INTAKE VALVE with 3/4" Air Bleeder without relief valve
- 5" Storz x 6" flat face 150# flange

Date: 03/10/22

Weight: 54 lbs.

Specification / Data Sheet

Sheet 1 of 1

H1000 150#