

HARRINGTON STORZ SPECIFICATION SHEET

HFL-FF-605030E/Cap


- 6" Flat Face 150# Carbon Steel Flange
- Weldneck Flange machined to 6" BSP male
- Zinc Rich Primer & Powder Coated

Hard Anodized 6061-T6 Aluminum

Mil-A-8625f, Type 3

- 30° Elbow (356), 6" BSP female x 5" BSP male with 6" BSP Gasket
Anodized, Zinc Rich Primer & Powder Coated
- 5" Storz with Storz-Lok with 5" BSP Gasket, 5" Storz Pressure Seal
- 5" Storz Cap with 5" Storz Suction Seal, attached with stainless steel aircraft cable

- 250 psi working pressure

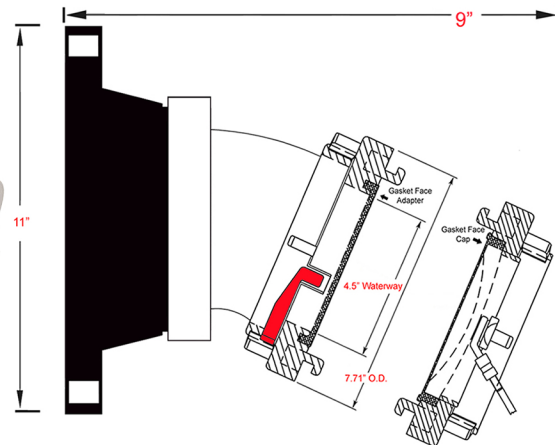

Harrington
STORZ CONNECT

2630 West 21st Street
Erie, PA 16506

ph. 800-553-0078
info@harrinc.com



HFL-FF-605030E/Cap

6" flat face 150# flange x Elbow 30° 5" Storz with Storz
Cap attached with stainless steel aircraft cable

Date: 01/01/26

Weight: 32 lbs.

Specification / Data Sheet

Not to scale



NFPA 1963 COMPLIANT

150# Flange