

# HARRINGTON STORZ SPECIFICATION SHEET

## HFL-RF-605030E/Cap


6" Raised Face 150# Carbon Steel Flange

- Weldneck Flange machined to 6" BSP male
- Zinc Rich Primer & Powder Coated

### Hard Anodized 6061-T6 Aluminum

Mil-A-8625f, Type 3

- 30° Elbow (356), 6" BSP female x 5" BSP male with 6" BSP Gasket  
Anodized, Zinc Rich Primer & Powder Coated
- 5" Storz with Storz-Lok with 5" BSP Gasket, 5" Storz Pressure Seal
- 5" Storz Cap with 5" Storz Suction Seal, attached with stainless steel aircraft cable

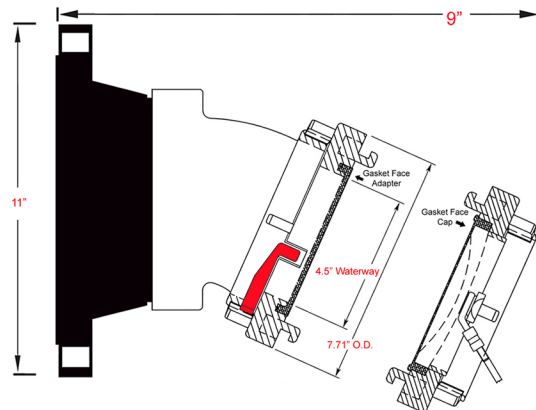

- 250 psi working pressure



**Harrington**  
**STORZ CONNECT**

**2630 West 21st Street**  
**Erie, PA 16506**

**ph. 800-553-0078**  
**info@harrinc.com**



## HFL-RF-605030E/Cap

6" raised face 150# flange x Elbow 30° 5" Storz with  
Storz Cap attached with stainless steel aircraft cable

Date: 01/01/26

Weight: 32 lbs.

Specification / Data Sheet

Not to scale



**NFPA 1963 COMPLIANT**

150# Flange