

# HARRINGTON CONNECTIONS

## HPHA50-45NH/Cap

### 5" STORZ x 4½" NH FEMALE HYDRANT ADAPTER & CAP

#### - 5" Storz x 4½" NH Female ADAPTER

- Metal Face Storz
- (2) Stainless Steel Setscrews
- Laser etched

#### - 5" Storz CAP

- Stainless Steel Aircraft Cable
- Reflective Cable


#### - Forged 6061-T6 Aluminum

- Hard Anodized to Mil-A-8625f, Type 3, Dark Gray

#### - NFPA 1963 Compliant

#### - 250 psi working pressure


#### - MADE IN USA

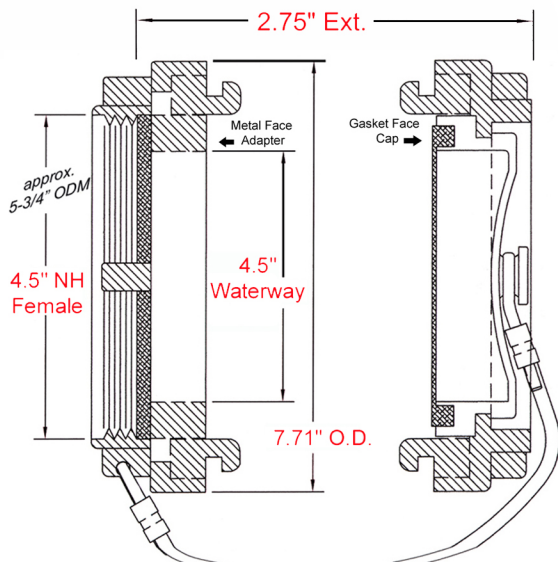

The Harrington Permanent Hydrant Adapter threads onto the male nozzle and is secured permanently to the hydrant. A Storz spanner wrench is required for cap removal.

The Storz adapter shall have a hard anodized aluminum metal face seal and hard anodized aluminum Storz ramps and lugs. The adapter's finish shall be hardcoat anodized to Mil-A-8625, Type 3, dark gray. The Adapter shall be made of forged 6061-T6 aluminum and secured to the nozzle with (2) stainless steel set screws, inserted 180° apart. The female adapter shall contain a flat rubber gasket which seals against the male hydrant nozzle.

The blind cap shall have hard anodized aluminum Storz ramps and lugs, made of forged 6061-T6 aluminum. The forged cap shall be equipped with a Storz seal. The cap shall be connected to the adapter with a 0.125" vinyl coated reflective aircraft cable. The high torque cap requires a Storz spanner wrench for removal. Once installed, the Harrington Permanent Hydrant Adapter extends less than 3" from the hydrant nozzle.



Harrington, Inc.  
2630 W. 21st St.  
Erie, PA 16506

Ph. 800-553-0078  
info@harrinc.com

## HPHA50-45NH/Cap

5" Storz Hydrant Adapter: 5 x 4½" NH Female  
w/(2) setscrews, Storz Cap and SS Cable

Date: 02/11/21

Weight: 7 lbs.

Specification / Data Sheet

Sheet 1 of 1

HPHA